



Delta

WATER SOFTENERS



Delta

DUPLEX

TIBERA



- *Soft water 24h/24h*
- *Non-electric operation*
- *Duplex parallel*
- *Reduced salt and water consumption*
- *High flow rates*

100% GREEN






Delta

WATER SOFTENERS

TIBERA

DIMENSIONS

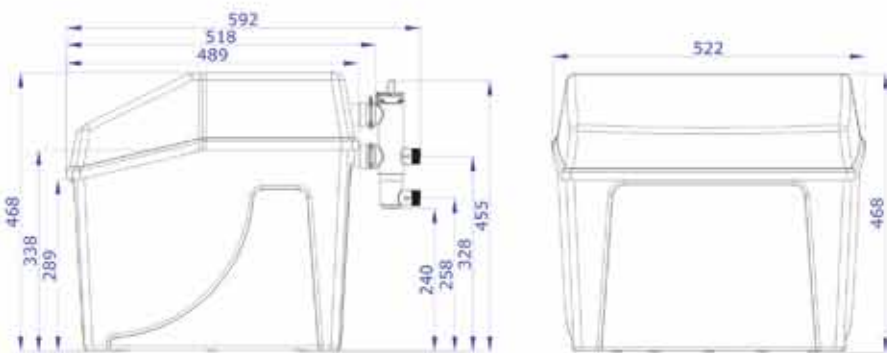

TECHNICAL DATA

Connection	1/2", 3/4", 1"
Working Pressure	1 - 8 bar*
Flow Rate (Δp 1 bar)	max. 2600 l/h
Exchange Capacity	2 x 150 m ³ /ppm CaCO ₃
Water Usage / Regeneration	18 L
Salt Usage / Regeneration	0,3 kg
Regeneration Time	15 min
Max. Temperature	50 °C
Filterscreen	80 µm

* for a correct regeneration, Delta Softeners require a minimum outlet pressure of 0.8 bar

100% GREEN

